





RV-FX可変側溝（消音タイプ°自由勾配側溝）縦断用

□ 形状図・特徴

1. 側溝の上幅を変えずに側壁外側をフラットにして、内部の作業性を良くしてあります。
2. 広く採用されているRVの消音理論を取り入れた、ガタツキのない蓋版構造です。

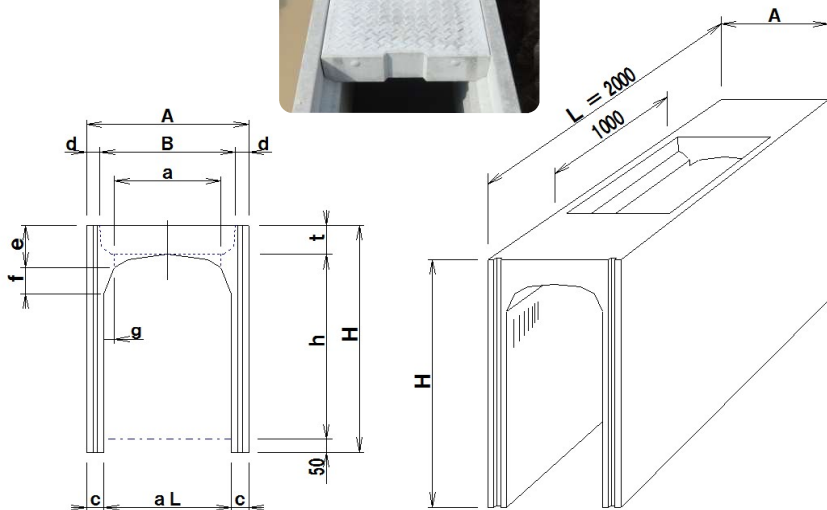

□ 在庫状況写真

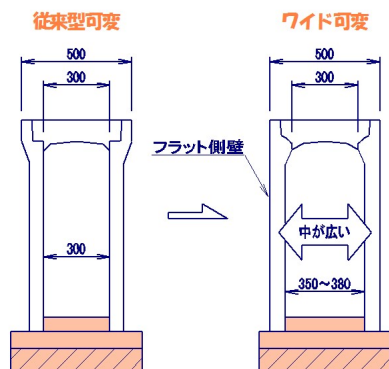

□ 規格・寸法表「縦断用」

呼び名 a × h	寸法表 (mm)										参考重量 (kg)	
	A	B	t	h	H	aL	c	d	e	f		g
300 × 300	500	410	95	300	445	380	60	45	130	70	37	361
300 × 400				400	545	380						416
300 × 500				500	645	380						472
300 × 600	500	410	95	600	745	360	70	45	130	70	27	585
300 × 700				700	845	360						651
300 × 800				800	945	360						718
300 × 900	500	410	95	900	1045	350	75	45	130	70	22	822
300 × 1000				1000	1145	350						894
300 × 1100				1100	1245	350						966
400 × 400	610	510	110	400	560	480	65	50	160	100	37	506
400 × 500				500	660	480						566
400 × 600				600	760	480						627
400 × 700	610	510	110	700	860	460	75	50	160	100	27	750
400 × 800				800	960	460						820
400 × 900				900	1060	460						890
400 × 1000	610	510	110	1000	1160	450	80	50	160	100	22	1010
400 × 1100				1100	1260	450						1085
400 × 1200				1200	1360	450						1160
500 × 500	720	610	125	500	675	570	75	55	195	115	30	688
500 × 600				600	775	570						758
500 × 700				700	875	570						828
500 × 800				800	975	570						898
500 × 900	720	610	125	900	1075	540	90	55	195	115	15	1086
500 × 1000				1000	1175	540						1170
500 × 1100				1100	1275	540						1255
500 × 1200	720	610	125	1200	1375	520	100	55	195	115	5	1448
500 × 1300				1300	1475	520						1542
500 × 1400				1400	1575	520						1636





RV-FX可変側溝（消音タイプ）縦断用 L=1000

形状図・特徴

- 側溝の影響幅を変えずに側壁外側をフラットにして、内部の作業性を良くしてあります。
- 広く採用されているRVの消音理論を取り入れた、ガツツキのない蓋版構造です。

L=1000 外観

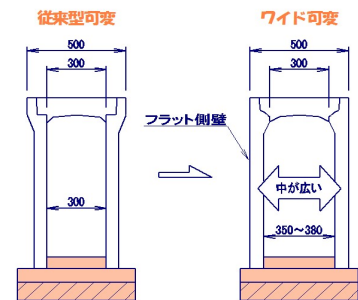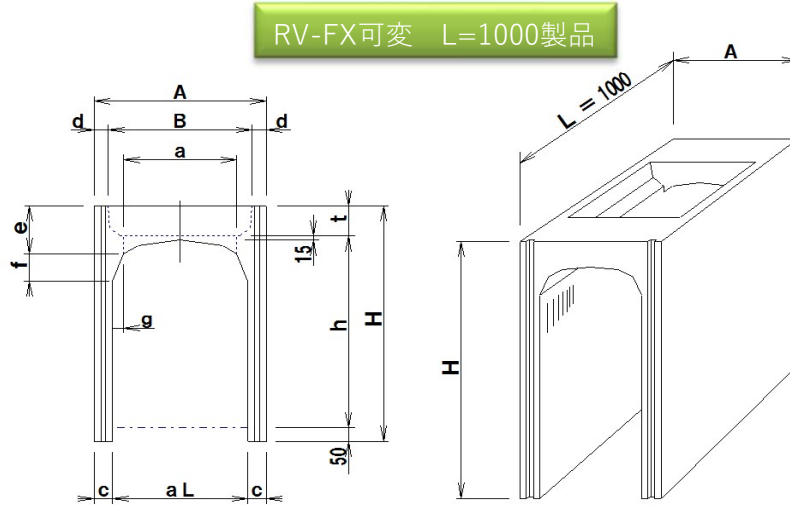

規格・寸法表「縦断用 L=1000」

呼び名 a × h	寸法表 (mm)											参考重量 (kg)
	A	B	t	h	H	aL	c	d	e	f	g	
300 × 300	500	410	95	300	445	380	60	45	130	70	37	180
300 × 400				400	545	380						208
300 × 500				500	645	380						236
300 × 600	500	410	95	600	745	360	70	45	130	70	27	292
300 × 700				700	845	360						325
300 × 800				800	945	360						359
300 × 900	500	410	95	900	1045	350	75	45	130	70	22	411
300 × 1000				1000	1145	350						447
300 × 1100				1100	1245	350						483
400 × 400	610	510	110	400	560	480	65	50	160	100	37	253
400 × 500				500	660	480						283
400 × 600				600	760	480						313
400 × 700	610	510	110	700	860	450	80	50	160	100	26	375
400 × 800				800	960	450						410
400 × 900				900	1060	450						445
400 × 1000	610	510	110	1000	1160	450	80	50	160	100	26	505
400 × 1100				1100	1260	450						542
400 × 1200				1200	1360	450						580
500 × 500	720	610	125	500	675	570	75	55	195	115	30	354
500 × 600				600	775	570						389
500 × 700				700	875	570						424
500 × 800				800	975	570						459
500 × 900	720	610	125	900	1075	540	90	55	195	115	15	552
500 × 1000				1000	1175	540						594
500 × 1100				1100	1275	540						636
500 × 1200	720	610	125	1200	1375	520	100	55	195	115	5	733
500 × 1300				1300	1475	520						780
500 × 1400				1400	1575	520						827